


## SLX1 Transmitters

SLX1

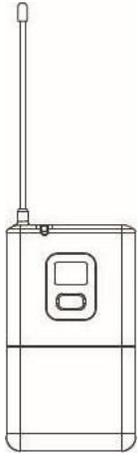

## Power / Infrared (IR) / Mute indicator

Green: ready

Amber: mute on

Flashing red: IR transmission in process


Glowing red: battery power low

Pulsing red: battery dead (transmitter cannot be turned on until batteries are changed)



## Changing Batteries


- Expected life for an Alkaline battery approximately 8 hours.
- When the transmitter light glows red, the batteries should be changed immediately, as shown on the left.

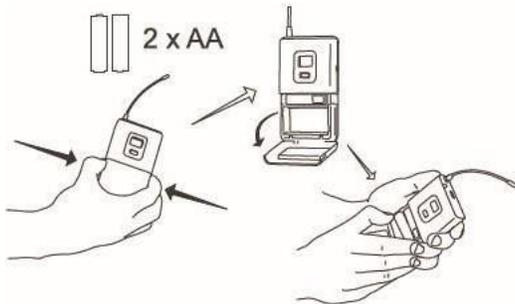

## Wearing the Bodypack Transmitter


Clip the transmitter to a or slide a guitar strap through the transmitter clip as shown.

For best results, slide the transmitter until the belt is pressed against the base of the clip.

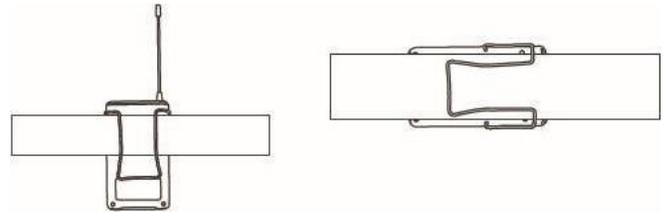

## On-off / mute switch

Press and hold to turn on/off. Press and release to mute or unmute.

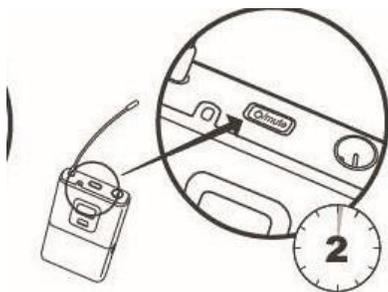

## Using the Pyle over-the-ear microphone

